



LED High Mast Light

POLAR SPORT

POLAR SPORT är certifierad för sportanläggningar med höga krav på ljuskvalitet. Armaturen är byggd med den senaste LED-tekniken och högsta materialkvalitet.

POLAR SPORT levereras med flera optikval för optimalt ljus med minimal bländning och låg energianvändning. Samtliga komponenter är utbytbara enligt EU-standard.

DALI/DMX styrning ger fullständig kontroll över anläggningen och styrs lokalt eller via nätverk.

20 års funktionsgaranti.



POLAR LED

Effect:

300W , 400W, 500W, 600W,
700W, 800W, 900W, 1000W, 1200W



Perfect Heatsink







Customized LOGO




Customized LOGO



Optic lens

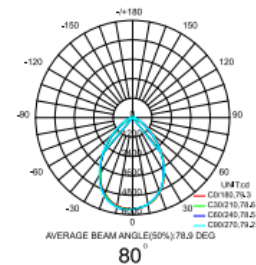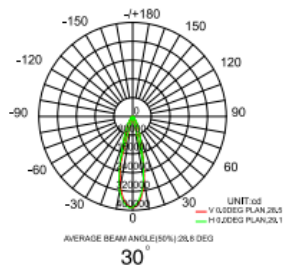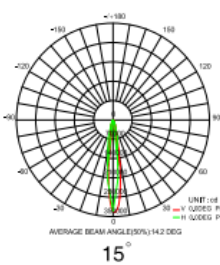

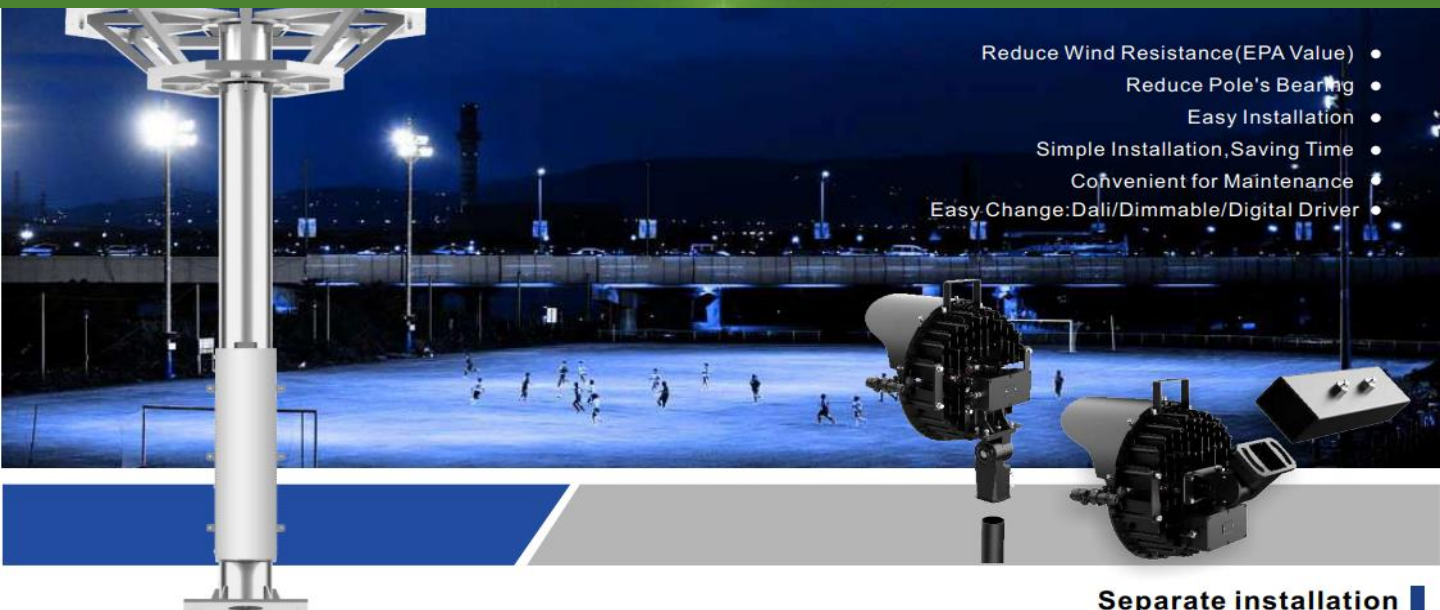

- Reduce Wind Resistance (EPA Value)
- Reduce Pole's Bearing
- Easy Installation
- Simple Installation, Saving Time
- Convenient for Maintenance
- Easy Change: Dali/Dimmable/Digital Driver



**Separate installation
Convenient for installation and maintenance**

POLAR LED

Specifikation

Produktnamn	POLAR SPORT	Styrning	DALI 2, ON off, DMX
Ar. Nr	LHM-PL-X	Skyddsklass	1 (Skall skyddsjordas)
Effekt	500-1200 W	PI	65
Ljusflöde	150 lum/w	Livslängd LED	L80@25 80 000 h
Färgåtergivning	Ra 93	Koppling	5 pins
Ljuskälla	LED	Energi class	C
Färgtemperatur	3000-6000 K	Certifiering	CE, EMC, Rhos
Drivdon	Inventronic EUM-240S670BG	Mått	554x593x467mm
Effektivitet	<94	Material	Rostfritt stål, Alu, Glas
Standby Power	0,5 W	Monteringshöjd	10-45 m
Inrush Current	At 220 Vac input, 25 °C cold start, duration=1.74 ms, 10% Ipk-10% Ipk		

Dimensions (mm)

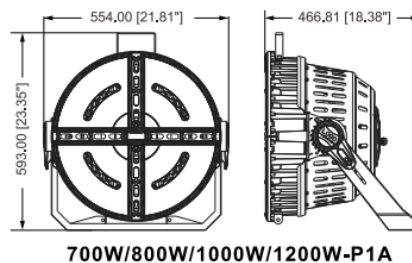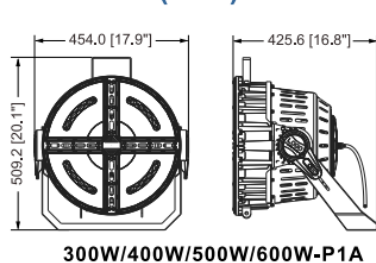

POLAR SPORT

Remarks	<p>Brown/Black – L Blue/White – N G/Y – GND</p>		
	<p>⚠ Caution :Vertical installation is absolutely not permitted.</p>		<p>⚠ Caution :When the angle of the luminous surface exceeds 90°, the lamp power is reduced by 20%.</p>

P1A/P1B/P1C/P1D Bracket

<p>01</p> <table border="1"> <thead> <tr> <th>Wattage</th> <th>d1</th> <th>d2</th> <th>d3</th> </tr> </thead> <tbody> <tr> <td>600W</td> <td>220mm</td> <td>25mm</td> <td>50mm</td> </tr> <tr> <td>1200W</td> <td>280mm</td> <td>40mm</td> <td>60mm</td> </tr> </tbody> </table>	Wattage	d1	d2	d3	600W	220mm	25mm	50mm	1200W	280mm	40mm	60mm	<p>02</p> <p>M6 (Optional)</p>	<p>02-a Only P1D/P4D</p> <p>M6x25 2PCS (standard)</p>	<p>02-b Only P1D/P4D</p> <p>Male Plug Female Plug</p>	<p>03</p> <p>Loosen the M6 hexagon socket screws to adjust beam angle</p>
Wattage	d1	d2	d3													
600W	220mm	25mm	50mm													
1200W	280mm	40mm	60mm													
		<p>04</p> <p>Double protection chain</p>	<p>05</p> <p>Driver AC cable Waterproof connector Electric supply AC power</p>													

